

Quality, reliability and a reasonable price.

Our reels feature totally enclosed, gasketed spring rewind mechanisms for the ultimate in protection from the elements. When paying out cable, a sturdy latching system holds the cable at the desired length. A gentle tug on the cable releases the latch, and the cable retracts back onto the reel.

Reel construction is of galvanized/zinc plated steel with a durable baked enamel finish. All bearing surfaces are permanently lubricated. Stainless steel springs are available when specified. Various combinations of cable, end fittings and color are available to custom tailor a reel to your specific requirements!

STANDARD MODELS

DMI-50CC	50' Cable Extension	3/32" dia. 7x7 Stainless cable, yellow Hytrel jacket/100 amp copper clamp
DMI-75CC	75' Cable Extension	3/32" dia. 7x7 Stainless cable, yellow Hytrel jacket/100 amp copper clamp
DMI-100CC	100' Cable Extension	3/32" dia. 7x19 Stainless cable, non-jacketed/100 amp copper clamp

Cable Options

3/32" 7x19 Stainless steel cable, non-jacketed
 3/32" 7x7 Galvanized steel, clear PVC jacket
 3/32" dia. 7x7 Stainless cable, yellow Hytrel jacket
 Wye Branch cable assemblies made to your requirements.

Cable Clamp and Plug Options

100 Amp Mueller Copper Clamp #21C (shown above)
 100 Amp Mueller 11A Extra Large Clamp
 Military Style Plug MIL-C 83413/4
 Military Style Clamp MIL-C 83413/7

All of our reel components are treated for corrosion resistance. Exterior can be painted green, red, or yellow to your specifications. Baked enamel green is standard.


Military Specification: A-A-50696

Electrical Resistance: 10 ohms max. (clamp to mounting base).

Life Cycle: Tested to 5,000 cycles (full extension and retraction).

Operating Temperature Range: -65° F to 125° F

Storage Temperature Range: -80° F to 160° F

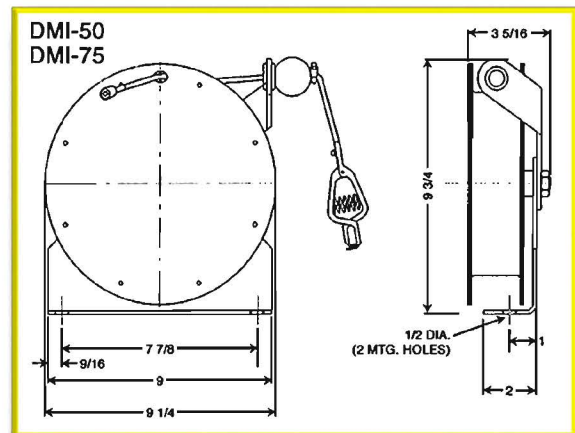

Delmaco Manufacturing, Inc.

21424 Cedar Creek Ave.
 Georgetown, DE 19947-6305

sales@delmacomfg.com
 www.delmacomfg.com
 phone: 302-521-8888
 fax: 302-856-6347